


mariner 3305 KT - 3706 KT



CONTROL PANEL

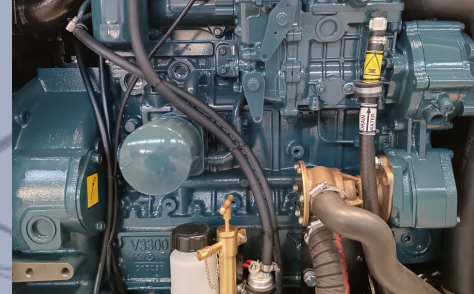

KUBOTA ENGINE



INPUT/OUTPUT FUEL PIPE

the engine is cooled by a coolant loop in a closed circuit. The system consists of a heat exchanger, inside which the heat exchange between coolant and sea water takes place. Two separate pumps provide for the circulation of coolant and seawater. Air flows ensure effective cooling of the alternator. The excellent accessibility makes maintenance operations easier, even with the generator installed in confined environments.



COMPACT
DESIGN



EASY
INSTALLATION

We reserve the right to modify the data, images and drawings in this document without prior notice.

For more detailed information, please contact your local distributor or Mase Generators S.p.A.



mase generators spa

Via Tortona, 345 | 47522 - Cesena (FC) | Italy

Tel. +39 0547 354311

commercial@masegenerators.com

www.masegenerators.com

mase
GENERATORS
Believing in change.

 Three-phase output power 33.5 kVA 50 Hz - 37.5 kVA 60 Hz

CONTROL PANEL

_ CBU EVO IL4 device controls and drives the genset. The large display and control pushbuttons allow easy use and monitoring:

- Manual start
- Voltage Vac
- Frequency Hz
- Hour meter
- Genset battery voltage
- Oil low pressure alarm
- Engine preheating
- Engine high temperature alarm
- Alternator battery charger failure alarm
- Protection alarm for frequency and rpm
- Alarm history
- Maintenance warnings
- General alarm outlet
- RUN outlet
- Ready outlet
- Programmable AUX outlet

_ Emergency stop button

_ Magneto-thermal protection

ENGINE

_ Easy maintenance access to the feeding and lubrication systems, the sea water pump and the air filter

_ Double vibration dumping system

_ Oil drain pump

CE Three-phase output power 33.5 kVA 50 Hz - 37.5 kVA 60 Hz

	50 Hz	60 Hz
AC alternator -	Synchronous, 4 poles, with AVR	
Cooling -	Air	
Voltage -	400 V	480 V
Frequency -	50 Hz	60 Hz
Amps -	48.4 A	45.2 A
Max power -	33.5 kVA	37.5 kVA
Continuous power -	30 kVA	34 kVA
Power Factor -	cos ϕ 0.8	
Insulating class -	H	
Voltage stability -	$\pm 2\%$	
Frequency stability -	$\pm 5\%$	

The power is referred to an atmospheric pressure of 100 kPa, a humidity percentage of 30% and an ambient temperature of 25°C.

Model -	Kubota V3300	
Type -	Diesel	
Cylinders -	nr 4	
Cylinder block material -	Cast iron	
Bore -	98 mm - 3.86 in	
Stroke -	110 mm - 4.33 in	
Displacement -	3318 cc - 202.48 CID	
Power -	38.8 hp - 28.54 kWm (at 1500 RPM)	45.1 hp - 33.17 kWm (at 1800 RPM)
RPM -	1500	1800
Compression ratio -	22.6:1	
Combustion system -	Indirect injection	
Engine head material -	Cast iron	
Speed governor -	Mechanical	
Lubrication system -	Forced	
Oil sump capacity with filter -	12.1 l - 3.41 gal	
Engine stop system -	Electromagnet	
Fuel pump -	Electric	
Max. fuel pump head -	700 mm - 27.5 in	
Fuel consumption -	13 l/h - 3.43 gal/h	14 l/h - 3.70 gal/h
Air intake -		
Starting battery -	100 Ah - 12 V	
Battery charger -	40 Ah - 12 V	
Starter motor -	2.5 kW - 12 V	
Max. inclination -	25°	
Water pump flow -	35 l/min - 9.24 gal/min	40 l/min - 10.56 gal/min
Sea water inlet pipe \varnothing -	30 mm - 1.25"	
Exhaust pipe \varnothing -	76 mm - 3"	
Input/Output fuel pipe \varnothing -	8 mm - 5/16"	
Dimensions (L x W x H) -	1250 x 630 x 820 mm - 49.2 x 24.8 x 32.3 in	
Weight -	620 Kg - 1367 lb	

Accessory

Code

ACCESSORIES ON REQUEST

• Filtering kit: sea water inlet, water filter, valves, fittings D.32 - ref.4	030906
• Siphon break kit D.32 - ref.3	030907
• Vetus muffler	70856
• Vetus MP75 silencer	71121
• Centek 3" muffler - ref.5	71282
• Centek 3" water/gas separator - ref.6	71283
• Remote START/STOP panel with 20m cable for Comap IL4 - ref.1	037561
• Comap IL4 remote start panel with 20m cable - ref.2	039607
• Cruise Kit	913811




.1



.2



.3

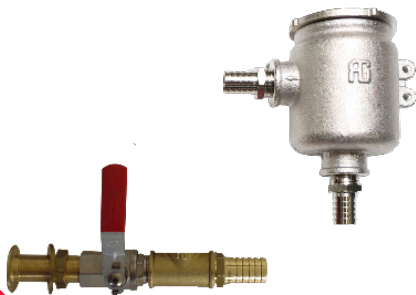

.4



.5



.6