

CURSOR series

C13 825

PLEASURE - Diesel

607 kW(825 HP) @ 2400 rpm (A1)

552 kW(750 HP) @ 2400 rpm (A2)

478 kW(650 HP) @ 2400 rpm (B)

442 kW(600 HP) @ 2400 rpm (C)

SPECIFICATIONS

Thermodynamic Cycle	Diesel 4 stroke
Air Handling	TAA
Arrangement	6L
Bore x Stroke (mm)	135 X 150
Total Displacement (l)	12.88
Valves per cylinder (n°)	4
Cooling System	liquid
Direction of Rotation (viewed facing flywheel)	CCW
Engine management	by EDC (Electronic Diesel Control)
InjectionSystem	EUI

STANDARD CONFIGURATION

Flywheel housing (type)	SAE 1
Flywheel size (inch)	14
Air Filter	rear side
Turbocharger	Two Waste Gate (water cooled) Turbo in parallel with Aftercooler (TAA)
Heat Exchanger	tube type
Exhaust gas water mixer - Exhaust cooled elbow	-
Water charge tank	included
Fuel filter (n°)	1 - right side
Fuel prefilter	1 (loose)
Fuel Pump	1 (gear type)
Lift pump	-
Oil filter (n°)	2
Oil sump	aluminium
Oil vapours blow-by circuit	included
Oil heat exchanger	included
Oil filler	by cylinder head cover
Starter	24V - 5.5kW
Alternator	28V - 90A
Engine stop device	by electronic central unit
Wiring harness	with negative to ground connection
Painting color	white "ICE"



ELECTRICAL SYSTEM

Voltage	24
---------	----

NOT INCLUDED IN STANDARD CONFIGURATION

Battery - minimum capacity recommended [*] (Ah)	2 x 180
Battery - minimum cold cranking capacity recommended [*] (A)	1200

WEIGHT AND DIMENSIONS



L = 1465

W = 1000

H = 1058

Dry Weight (without marine gear)= Kg 1395

Legend









Arrangement	Air Handling	Turbocharger	InjectionSystem	
L (in line)	TAA (Turbocharged with aftercooler) TC (Turbocharged)	WG (Wastegate) VGT (Variable Geometry)	M (Mechanical) ECR (Electronic Common Rail)	SD: Stern Drive version PD (POD Drive version)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM



RATING TYPE	A1	A2	B	C
Maximum power (kW(HP)@rpm)	607 (825) @ 2400	552 (750) @ 2400	478 (650) @ 2400	442 (600) @ 2400
High idle speed (rpm)	2580	2580	2580	2580
Low idle speed (rpm)	± 600	± 600	± 600	± 600
Mean piston speed at rated speed (m/s)	12	12	12	12
BMEP at max power (kg/cm)	22.5	20.5	17.8	16.4
Specific fuel consumption at full load (best value) (g/kWh @ rpm)	229.1	227.5	220.7	221.6
Oil consumption at max rating (% of fuel cons.)			≤ 0.2	
Minimum starting temperature without auxiliaries (°C)			-10 °	
Oil and oil filter maintenance interval for replacement [***] (hours)			600	

* Net Power at flywheel according to ISO 3046/1, after 50 hours running, Fuel Diesel EN 590. Power tolerance 5%.

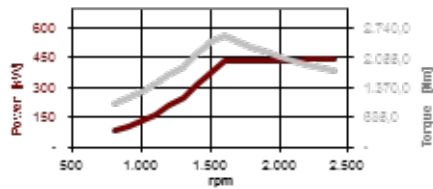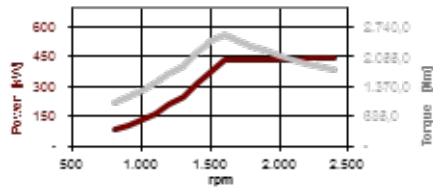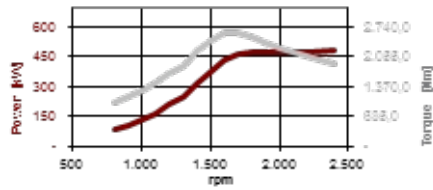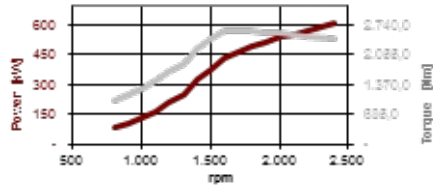

- A1 High Performance Crafts. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 300 hours per year.
- A2 Pleasure Commercial Vessels. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1000 hours per year.
- B Light Duty: Full throttle operation restricted within 10% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1500 hours per year.
- C Medium Duty: Full throttle operation < 25% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 3000 hours per year.
- D Heavy Duty

FPT INDUSTRIAL OFFERS THE WIDEST AVAILABILITY OF ENGINE BUILD OPTIONS TO CUSTOMER SPECIFIC REQUIREMENTS WITHIN THE ENGINE SUPPLY. TO FIND OUT MORE ABOUT THE CONFIGURATIONS AND ACCESSORIES WHICH ARE AVAILABLE

